




















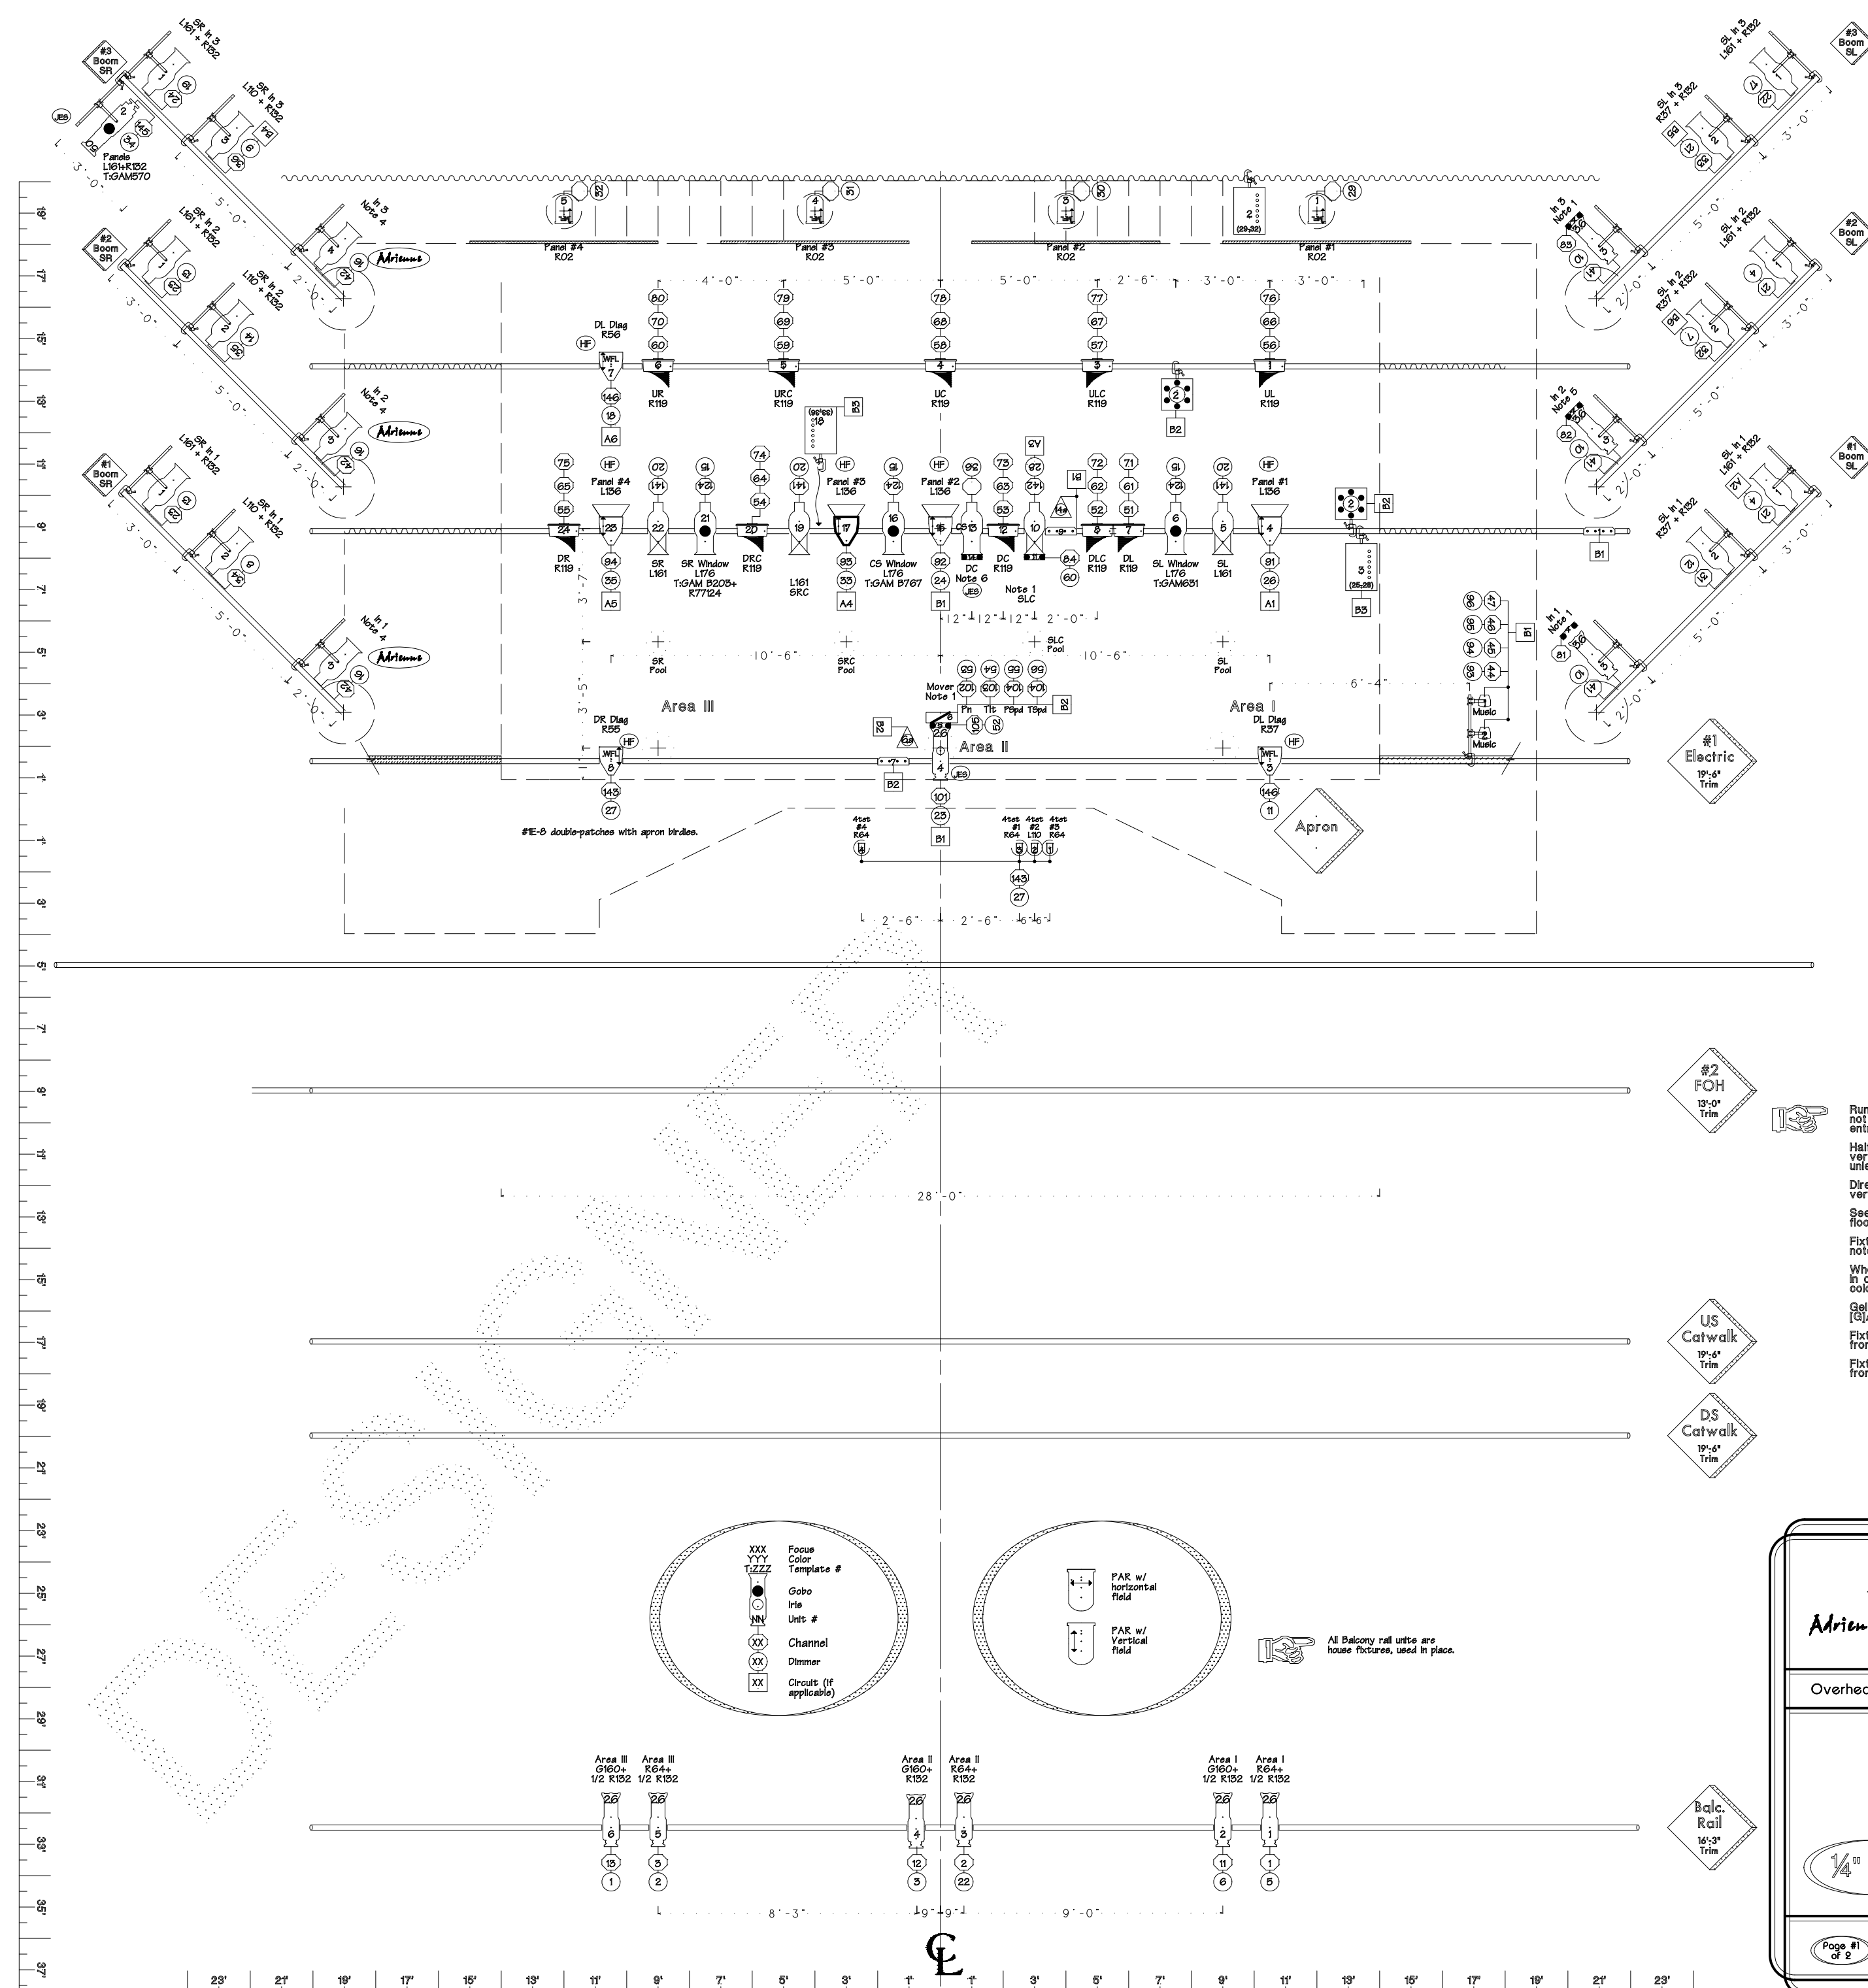


Key to Symbols

-  50-Degree Altman Shakespeare (575W -- 1 Available)
-  30-Degree Altman Shakespeare (575W -- 1 Available)
-  Colortran 15/35 Zoom (575W -- 2 Available)
-  Altman 360Q 6"x16" (575W -- 4 Available)
-  Altman 360Q 6"x12" (575W -- 2 Available)
-  Altman 360Q 6"x9" (575W -- 18 Available)
-  26-Degree ETC Source 4 (750W -- 7 Available)
-  36-Degree ETC Source 4 (750W -- 3 Available)
-  6" Fresnel (500W -- 7 Available)
-  Source 4 PAR (Beam Size & Orientation as Marked) (KW -- 10 Available)
-  PAR64 (WFL -- Orientation as Marked) (KW -- 10 Available)
-  PAR56 (300W MFL) (4 Available)
-  MR16 (75W) (4 Available)
-  Altman SpectraPAR LED Fixture (50W) (MFL -- Vertical Lens Flare)
-  18-Degree Colour-Pod LED Fixture (2 Available)
-  Fleenor Designs 6-Channel LED Controller
-  Chroma-Q or Forerunner Color Scroller (See paperwork for details)
-  Ellip-Scan Moving Mirror
-  1/2 High Hat (Eyebrow)
-  Barn Door
-  2-Way Forerunner Power Supply
- Chauvet 2-Way or Fleenor 6-Way DMX Splitter or 6-Way Forerunner Power Supply (see Instrument Schedule)
- Chauvet DMX-4 Dimmer Pack

* Unless otherwise noted



#3 Electric 19'-6" Trim

#2 Electric 19'-6" Trim

#1 Electric 19'-6" Trim

#1 FOH 19'-6" Trim

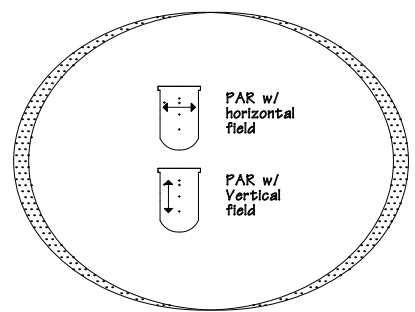
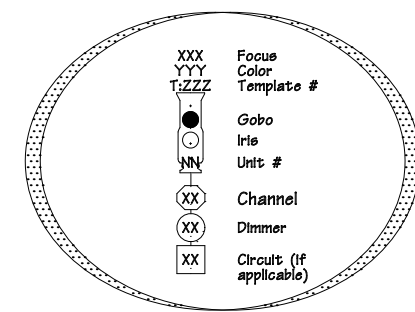
#2 FOH 19'-6" Trim

US Catwalk 19'-6" Trim

DS Catwalk 19'-6" Trim

Balc. Rail 19'-6" Trim

Run all cables above head height - do not tape cables to floor across performer entrances.
 Half out of diffusion, where called for, are vertical, on the onstage side of the frame, unless otherwise noted.
 Directional diffusion, where called for, is vertical, unless otherwise noted.
 See designer for exact placement of all floor-mounted units.
 Fixture spacing is 18" unless otherwise noted.
 Where Rosco Heat Shield is used, insert in discrete frame between lens and other color media.
 Gel and gobo manufacturers are [A]pollo, [G]AM, [L]ee, and [R]osco.
 Fixtures marked "H" are house fixtures from top plot, remaining in position.
 Fixtures in bold are house fixtures moved from other locations.



All balcony rail units are house fixtures, used in place.

HOME

Adrienne Celeste Fodjo DANCE

Overhead Electrics

Adrienne Celeste Fodjo,
Artistic Director

Jeffrey E. Salzberg,
Lighting Designer
November, 2005

14th Street Y

1/4" = 1'

Page #1 of 2 (917) 238-7430 jeff@jeffsalzberg.com http://www.jeffsalzberg.com